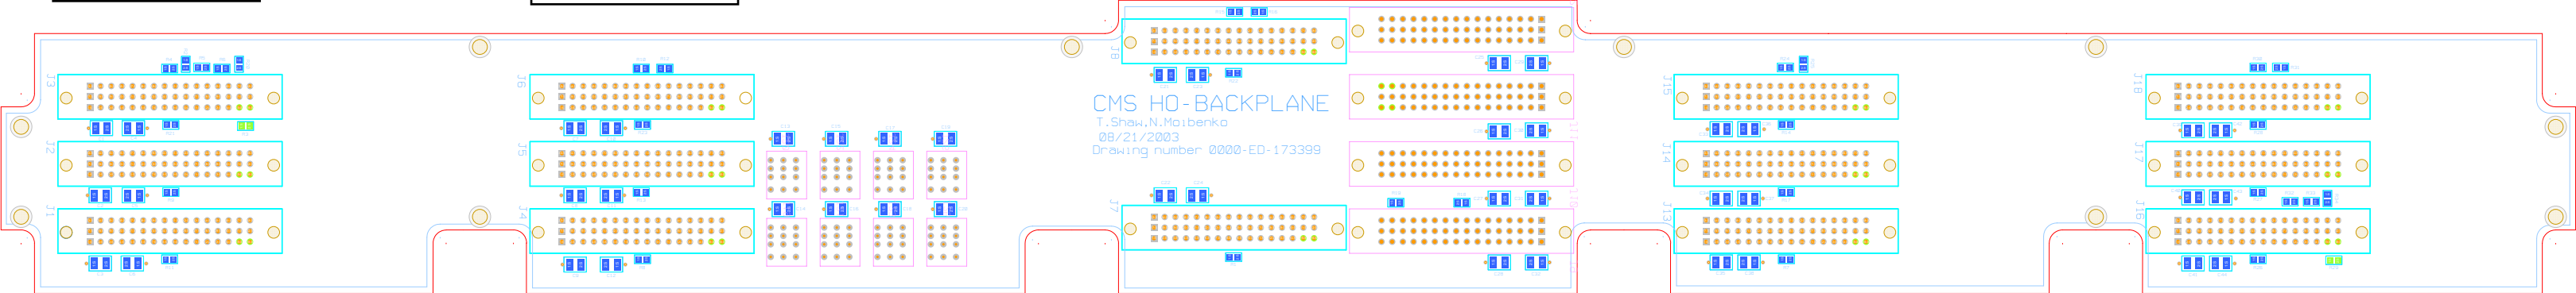RM Position 4
Core 1
GA2 RB3
GA1 RB2
GA0 RB1

RM Position 3
Core 2
GA2 RB3
GA1 RB2
GA0 RB1

Calibration Module
Core 3
Slot 7 - Pulser Module
Slot 8 - QIE Readout

CCM Module
Slot 9 - Serial Communication
Slot 10 - Temperature
Slot 11 - Timing A
Slot 12 - Timing B

RM Position 2
Core 4
GA2 RB3
GA1 RB2
GA0 RB1

RM Position 1
Core 5
GA2 RB3
GA1 RB2
GA0 RB1

CMS HO-BACKPLANE
T.Shaw,N.Moibenko
08/21/2003
Drawing number 0000-ED-173399

CCM Module
has the ability to address up to 6 groupes of backplane cards.
These groups are referred to as cores.

GA0, GA1, and GA2
represents the Geographical Address within a CCM core group.
These are two bit addresses with
GA0=0x00, GA1=0x01, GA2=0x10
These GA bits are used as the two high order bits of the serial
communication address.

RB1, RB2 and RB3 represent the FE card
position within the RM.